Bayint
Your Partner in Disease Chronic Management

Website: www.bayint.com
Email: deby@bayint.com
MOB: +86 18565771898

Micro Hyperbaric Oxygen Chamber（HBOT)

TELEVISION	AIR-CONDITIONING	SOFA	TRIM PANEL	CARPET
Brand: Hisense Size: 32 inches Model: Vidda 32V1F-R 32 inch Voice control: mobile app voice remote control TV types: Smart TV, karaoke TV, game TV Eye protection TV: Eye protection TV	Brand: AUX Specification: 1 horsepower Yuexin New Level 1 Energy Efficiency Model: KFR-32GW/NhGh1B	Brand: Customized functional sofa Model: K135 Specification: Single person electric sofa Color: Khaki Material: Contact surface layer cowhide Function: Electric Sitting and Lying+USB	Brand: Yihe Carbon Crystal Plate Process: Oxygen cloth texture milky white Specification: Bamboo wood fiber carbon crystal panel Wall panel thickness: ≤ 3mm Additional function: Thermal insulation	Brand: Shurjian New Zealand wool carpet Weaving method: Machine weaving Material: Hemp Bottom Style: Extremely simple style Shape: Square Pattern: Stripe Material: Wool Wool: 20% ≤ Wool content ＜ 45%

Detailed parameter table for D3 single cabin:

Cabin configuration		Configuration of pressurized oxygen production system	
content:	Parameter specifications	content:	Parameter specifications
PRODUCT MODEL	D3 Single Deluxe Cabin	Compressor brand	Thomas Thomas
Capacity	1-person electric function sofa	PSA molecular sieve	UOP Honeywell
Operating software	Bayint	Control valve solenoid valve	Japan SMC
Touch screen display	pattern. Lighting Temperature Humidity Cabin pressure Oxygen concentration Traffic Accumulated working time of oxygen concentrator Oxygen concentration inside the cabin Altitude, etc	Security Configuration	Manual pressure relief valve. 3x fully automatic safety valve Emergency stop switch, observation window
Call system	Self developed integrated duplex intercom system	Oxygen production flow rate	10L oxygen concentrator
Control method	Internal and external dual screen capacitive touch type	Maximum Boost Flow	205L/min
Cabin size	2136x1036x1985mm	Working pressure boosting flow rate	75L/min
Host size	1004*420+1450mm	Oxygen concentration	93% ± 3%
Cabin material	SPCC carbon steel plate, square steel	Oxygen concentration inside the cabin	23%~25%
Cabin door material	30mm high transparency imported explosion-proof PC	power supply	220V-50HZ
Cabin working pressure	10-30kpa adjustable	Maximum power (excluding air conditioning)	1050W
Work noise (in cabin)	≤46db	Maximum power (including air conditioning)	2200W
Work noise (outside the cabin)	≤55db	Maximum boost rate	≤6kPa/min
Cabin lighting	Double row three color adjustable lighting system	Maximum voltage reduction rate	≤20kPa/min
Fresh air system	Exclusive innovative data detection for interval ventilation	Ventilation Volume	15m³/20min
configuration	Electric leather sofa, Hisense TV, AUX air conditioner	work environment	Temperature: -20-40 ℃ Humidity: 30-90%
Decorative materials	E0 grade environmentally friendly material B1 flame retardant material	Installation method	Modular assembly
Oxygen supply pipe	Equipped with a headset and nasal suction oxygen inhalation device inside the cabin		

Bayint
Your Partner in Disease Chronic Management

Website: www.bayint.com
Email: deby@bayint.com
MOB: +86 18565771898

Micro Hyperbaric Oxygen Chamber（HBOT)

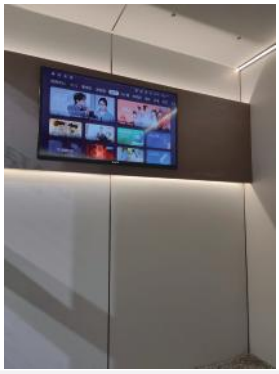

TELEVISION	AIR-CONDITIONING	SOFA	TRIM PANEL	CARPET
Brand: Hisense Size: 32 inches Model: Vidda 32V1F-R 32 inch Voice control: mobile app voice remote control TV types: Smart TV, karaoke TV, game TV Eye protection TV: Eye protection TV	Brand: AUX Specification: 1 horsepower Yuexin New Level 1 Energy Efficiency Model: KFR-32GW/NhGh1B	Brand: Customized functional sofa Model: K135 Specification: Single person electric sofa Color: Khaki Material: Contact surface layer cowhide Function: Electric Sitting and Lying+USB	Brand: Yihe Carbon Crystal Plate Process: Oxygen cloth texture milky white Specification: Bamboo wood fiber carbon crystal panel Wall panel thickness: ≤ 3mm Additional function: Thermal insulation	Brand: Shurjian New Zealand wool carpet Weaving method: Machine weaving Material: Hemp Bottom Style: Extremely simple style Shape: Square Pattern: Stripe Material: Wool Wool: 20% ≤ Wool content ＜ 45%

D6 Double Cabin Detailed Parameter Table

Cabin configuration		Configuration of pressurized oxygen production system	
content:	Parameter specifications	content:	Parameter specifications
PRODUCT MODEL	D6 Double Deluxe Cabin	Compressor brand	Thomas Thomas
Capacity	2-person electric function sofa	PSA molecular sieve	UOP Honeywell
Operating software	Bayint	Control valve solenoid valve	Japan SMC
Touch screen display	pattern. Lighting Temperature Humidity Cabin pressure Oxygen concentration Traffic Accumulated working time of oxygen concentrator Oxygen concentration inside the cabin Altitude, etc	Security Configuration	Manual pressure relief valve. 3x fully automatic safety valve Emergency stop switch
Call system	Self developed integrated duplex intercom system	Oxygen production flow rate	10L oxygen concentrator
Control method	Internal and external dual screen capacitive touch type	Maximum Boost Flow	205L/min
Cabin size	2136x1036x1985mm	Working pressure boosting flow rate	75L/min
Host size	1004*420+1450mm	Oxygen concentration	93% ± 3%
Cabin material	SPCC carbon steel plate, 6.3 # channel steel, 10 #channel steel	Oxygen concentration inside the cabin	23%~25%
Cabin door material	High transparency imported PC5Cm	power supply	220V-50HZ
Cabin working pressure	10-30kpa adjustable	Maximum power (excluding air conditioning)	1050W
Work noise (in cabin)	≤46db	Maximum power (including air conditioning)	2200W
Work noise (outside the cabin)	≤55db	Maximum boost rate	≤5kPa/min
Cabin lighting	Double row three color adjustable lighting system	Maximum voltage reduction rate	≤10kPa/min
Fresh air system	Exclusive innovative data detection for interval ventilation	Ventilation Volume	30m³/20min
configuration	Electric leather sofa, Hisense TV, AUX air conditioner	work environment	Temperature: -20-40 ℃ Humidity: 30-90%
Decorative materials	E0 grade environmentally friendly material B1 flame retardant material	Installation method	Modular assembly
Oxygen supply pipe	Equipped with a headset and nasal suction oxygen inhalation device inside the cabin		

Bayint
Your Partner in Disease Chronic Management

Website: www.bayint.com
Email: deby@bayint.com
MOB: +86 18565771898

Micro Hyperbaric Oxygen Chamber（HBOT)

TELEVISION	AIR-CONDITIONING	SOFA	TRIM PANEL	CARPET
Brand: Huawei Specification: Smart Screen SE43MEMC Size: 43 inches Model: Huawei SE43MEMC Voice Control: Artificial Intelligence Voice Control TV types: Smart TV, karaoke TV, game TV Eye protection TV: Eye protection TV	Brand: AUX Specification: 1 horsepower Yuexin New Level 1 Energy Efficiency Model: KFR-32GW/NhGh1B	Brand: Customized functional sofa Model: K135 Specification: Single person electric sofa Color: Khaki Material: Contact surface layer cowhide Function: Electric Sitting and Lying+USB	Brand: Yihe Carbon Crystal Plate Process: Oxygen cloth texture milky white Specification: Bamboo wood fiber carbon crystal panel Wall panel thickness: ≤ 3mm Additional function: Thermal insulation	Brand: Shurjian New Zealand wool carpet Weaving method: Machine weaving Material: Hemp Bottom Style: Extremely simple style Shape: Square Pattern: Stripe Material: Wool Wool: 20% ≤ Wool content < 45%

D8 Four Person Cabin Detailed Parameter Table

Cabin configuration		Configuration of pressurized oxygen production system	
content:	Parameter specifications	content:	Parameter specifications
PRODUCT MODEL	Four person deluxe cabin	Compressor brand	Thomas Thomas
Capacity	4-person electric function sofa	PSA molecular sieve	UOP Honeywell
Operating software	Bayint	Control valve solenoid valve	Japan SMC
Touch screen display	pattern. Lighting Temperature Humidity Cabin pressure Oxygen concentration Traffic Accumulated working time of oxygen concentrator Oxygen concentration inside the cabin Altitude, etc	Security Configuration	Manual pressure relief valve. 3x fully automatic safety valve Emergency stop switch, observation window
Call system	Self developed integrated duplex intercom system	Oxygen production flow rate	20L
Control method	Internal and external dual screen capacitive touch type	Maximum Boost Flow	390L/min
Cabin size	3330x1898x1985mm	Working pressure boosting flow rate	130L/min
Host size	1004+530:*1450mm	Oxygen concentration	93% ± 3%
Whole machine weight	About 2241kg	Oxygen concentration inside the cabin	23%~25%
Cabin material	SPCC carbon steel plate, square steel	power supply	220V-50HZ
Cabin door material	25mm high transparency imported explosion-proof PC	Maximum power (excluding air conditioning)	1800W
Cabin working pressure	10-30kpa adjustable (customizable 50kna)	Maximum power (including air conditioning)	2950W
Work noise (in cabin)	≤46db	Maximum boost rate	≤5kPa/min
Work noise (outside the cabin)	≤55db	Maximum voltage reduction rate	≤16kPa/min
Cabin lighting	Double row three color adjustable lighting system	Ventilation Volume	20m³/20min
Fresh air system	Exclusive innovative data detection for interval ventilation	work environment	Temperature: -20-40 ℃ Humidity: 30-90%
configuration	Electric leather sofa, Hisense TV, AUX air conditioner	Installation method	Modular assembly
Decorative materials	E0 grade environmentally friendly material B1 flame retardant material		

Bayint
Your Partner in Disease Chronic Management

Website: www.bayint.com
Email: deby@bayint.com
MOB: +86 18565771898

Micro Hyperbaric Oxygen Chamber（HBOT)

TELEVISION	AIR-CONDITIONING	SOFA	TRIM PANEL	CARPET
Brand: Huawei Specification: Smart Screen SE43MEMC Size: 43 inches Model: Huawei SE43MEMC Voice Control: Artificial Intelligence Voice Control TV types: Smart TV, karaoke TV, game TV Eye protection TV: Eye protection TV	Brand: GREE Specification: 1.5 horsepower Yuexin New Level 1 Energy Efficiency Model: KFR-32GW/NhGh1B	Brand: Customized functional sofa Model: K135 Specification: Single person electric sofa Color: Khaki Material: Contact surface layer cowhide Function: Electric Sitting and Lying+USB	Brand: Yihe Carbon Crystal Plate Process: Oxygen cloth texture milky white Specification: Bamboo wood fiber carbon crystal panel Wall panel thickness: ≤ 3mm Additional function: Thermal insulation	Brand: Shurjian New Zealand wool carpet Weaving method: Machine weaving Material: Hemp Bottom Style: Extremely simple style Shape: Square Pattern: Stripe Material: Wool Wool: 20% ≤ Wool content ＜ 45%

D10 Six Person Cabin Detailed Configuration Table

Cabin configuration		Configuration of pressurized oxygen production system	
content:	Parameter specifications	content:	Parameter specifications
PRODUCT MODEL	6-person deluxe cabin	Compressor brand	Thomas Thomas
Capacity	6-person electric sofa	PSA molecular sieve	UOP Honeywell
Operating software	Bayint	Control valve solenoid valve	Japan SMC
Touch screen display	pattern. Lighting Temperature Humidity Cabin pressure Oxygen concentration Traffic Accumulated working time of oxygen concentrator Oxygen concentration inside the cabin Altitude, etc	Security Configuration	Manual pressure relief valve. 3x fully automatic safety valve Emergency stop switch, observation window
Call system	Self developed integrated duplex intercom system	Oxygen production flow rate	20L
Control method	Internal and external dual screen capacitive touch type	Maximum Boost Flow	390L/min
Cabin size	4235*2365*2000mm	Working pressure boosting flow rate	130L/min
Host size	450x1020x1420mm	Oxygen concentration	93% ± 3%
Whole machine weight	Approximately 4872Kg	Oxygen concentration inside the cabin	23%~25%
Cabin material	SPCC carbon steel plate, square steel	power supply	220V-50HZ
Cabin door material	2.5cm high transparency imported explosion-proof PC	Maximum power (excluding air conditioning)	1800W
Cabin working pressure	10-30kpa adjustable	Maximum power (including air conditioning)	2950W
Work noise (in cabin)	≤46db	Maximum boost rate	≤4kPa/min
Work noise (outside the cabin)	≤55db	Maximum voltage reduction rate	≤12kPa/min
Cabin lighting	Double row three color adjustable lighting system	Ventilation Volume	15m³/20min
Fresh air system	Exclusive innovative data detection for interval ventilation	work environment	Temperature: -15-40 °C; Humidity: 30-90%
television	43 inch Huawei E 【 2G+16G 】	material	E0 grade environmentally friendly material B1 positive combustion material
air-conditioning	Gree 1.5 horsepower KFR-32GW/hH1B	trim panel	Yihe Bamboo Wood Eco friendly Carbon Crystal Board
sofa	Customized functional sofa		

Bayint
Your Partner in Disease Chronic Management

Website: www.bayint.com
Email: deby@bayint.com
MOB: +86 18565771898

Micro Hyperbaric Oxygen Chamber（HBOT）

TELEVISION	AIR-CONDITIONING	SOFA	TRIM PANEL	CARPET
Brand: Hisense Size: 32 inches Model: Vidda 32V1F-R 32 inch TV types: Smart TV, karaoke TV, game TV Eye protection TV: Eye protection TV	Brand: AUX Specification: 1 horsepower Yuexin New Level 1 Energy Efficiency Model: KFR-32GW/NhGh1B	Brand: Customized functional sofa Specification: Single electric massage sofa Color: Khaki Material: Contact surface layer cowhide Function: Electric sitting and lying+massage+USB	Brand: Yihe Carbon Crystal Plate Process: Oxygen cloth texture milky white Specification: Bamboo wood fiber carbon crystal panel Wall panel thickness: ≤ 3mm Additional function: Thermal insulation	Brand: Shurjian New Zealand wool carpet Weaving method: Machine weaving Material: Hemp Bottom Style: Extremely simple style Shape: Square Pattern: Stripe Material: Wool Wool: 20% ≤ Wool content ＜ 45%

V3 Exclusive Single Cabin Detailed Parameter Table

Cabin configuration		Configuration of pressurized oxygen production system	
content:	Parameter specifications	content:	Parameter specifications
PRODUCT MODEL	V3 Exclusive Single Cabin	Compressor brand	Thomas Thomas
Capacity	1-person electric massage sofa	PSA molecular sieve	UOP Honeywell
Operating software	Bayint	Control valve solenoid valve	Japan SMC
Touch screen display	pattern. Lighting Temperature Humidity Cabin pressure Oxygen concentration Flowing Accumulated working time of oxygen concentrator Oxygen concentration inside the cabin Altitude, disinfection and sterilization, air conditioning control, wiFi, Le, IoT functions, etc	Security Configuration	Manual pressure relief valve. 3x fully automatic safety valve Emergency stop switch, observe the chimney
Call system	Self developed integrated duplex intercom system	Oxygen production flow rate	10L oxygen concentrator
Control method	Internal and external dual screen capacitive touch type	Maximum Boost Flow	220L/min
Cabin size	2144*1066*1985mm	Working pressure boosting flow rate	90L/min
Host size	480x1066x1985mm	Oxygen concentration	93% ± 3%
Whole machine weight	Approximately 1164Kg	Oxygen concentration inside the cabin	23%~25%
Cabin material	SFCC carbon steel plate, square steel ABS	power supply	220V-50HZ
Cabin door material	30mm high transparency imported explosion-proof FC	Maximum power (excluding air conditioning)	1900W
Cabin working pressure	10-50kpa adjustable	Maximum power (including air conditioning)	3000W
Work noise (in cabin)	≤43db	Maximum boost rate	≤4kPa/min
Work noise (outside the cabin)	≤53db	Maximum voltage reduction rate	≤12kPa/min
Cabin lighting	Double row three color adjustable lighting system	Ventilation Volume	15m³/20min
Fresh air system	Exclusive innovative data detection for interval ventilation	work environment	Temperature: -20-40~C Humidity: 30-30%
configuration	Electric leather massage sofa, Hisense TV, AUX air conditioning	Installation method	Modular assembly
Decorative materials	E0 grade environmentally friendly material B1 flame retardant material		

Bayint
Your Partner in Disease Chronic Management

Website: www.bayint.com
Email: deby@bayint.com
MOB: +86 18565771898

Micro Hyperbaric Oxygen Chamber（HBOT)

TELEVISION	AIR-CONDITIONING	SOFA	TRIM PANEL	CARPET
Brand: Hisense Size: 32 inches Model: Vidda 32V1F-R 32 inch Voice control: mobile app voice remote control TV types: Smart TV, karaoke TV, game TV Eye protection TV: Eye protection TV	Brand: AUX Specification: 1 horsepower Yuexin New Level 1 Energy Efficiency Model: KFR-32GW/NhGh1B	Brand: Customized functional sofa Specification: Single electric massage sofa Color: Khaki Material: Contact surface layer cowhide Function: Electric sitting and lying+massage+USB	Brand: Yihe Carbon Crystal Plate Process: Oxygen cloth texture milky white Specification: Bamboo wood fiber carbon crystal panel Wall panel thickness: ≤ 3mm Additional function: Thermal insulation	Brand: Shurjian New Zealand wool carpet Weaving method: Machine weaving Material: Hemp Bottom Style: Extremely simple style Shape: Square Pattern: Stripe Material: Wool Wool: 20% ≤ Wool content < 45%

Detailed parameter table of V6 double cabin

Cabin configuration		Configuration of pressurized oxygen production system	
content:	Parameter specifications	content:	Parameter specifications
PRODUCT MODEL	V6 Double Exclusive Cabin	Compressor brand	Thomas Thomas
Capacity	2-person electric massage function sofa	PSA molecular sieve	UOP Honeywell
Operating software	Bayint	Control valve solenoid valve	Japan SMC
Touch screen display	pattern. Lighting Temperature Humidity Cabin pressure Oxygen concentration Flowing Oxygen concentrator is tired; working hours. Oxygen concentration inside the cabin Altitude, disinfection and sterilization, air conditioning control, wiFi， Music, IoT functions, etc	Security Configuration	Manual pressure relief valve. 3x fully automatic safety valve Emergency stop switch, observation window
Call system	Self developed integrated duplex intercom system	Oxygen production flow rate	10L oxygen concentrator
Control method	Internal and external dual screen capacitive touch type	Maximum Boost Flow	205L/min
Cabin size	2144*1938*1985mm	Working pressure boosting flow rate	75L/min
Host size	480x1066x1985mm	Oxygen concentration	93% ± 3%
Whole machine weight	Approximately 1762Kg	Oxygen concentration inside the cabin	23%~25%
Cabin material	SFCC carbon steel plate, square steel ABS	power supply	220V-50HZ
Cabin door material	30mm high transparency imported explosion-proof FC	Maximum power (excluding air conditioning)	1050W
Cabin working pressure	10-50kpa adjustable	Maximum power (including air conditioning)	2200W
Work noise (in cabin)	≤46db	Maximum boost rate	≤4kPa/min
Work noise (outside the cabin)	≤55db	Maximum voltage reduction rate	≤20kPa/min
Cabin lighting	Double row three color adjustable lighting system	Ventilation Volume	$10m^3$/20min
Fresh air system	Exclusive innovative data detection for interval ventilation	work environment	Temperature: -20-40 ℃ Humidity: 30-30%
configuration	Electric leather massage sofa, Hisense TV, AUX air conditioning	Installation method	Modular assembly
Decorative materials	E0 grade environmentally friendly material B1 smoldering material		