Bayint

Your Chronic Disease Care Partner

www.bayint.com
info@bayint.com

Headquarters:Rm 1008B-c17, Block A, Xinian Center, 6021 Shennan Ave, Futian, Shenzhen, Guangdong, China

Trolley of vital sign monitor

Parameter:

Material: aluminum alloy, steel, modified engineering plastic;

Platform parameters: suitable for most of the equipment, tilt angle of 45 °

Load capacity: 3-7kg, support holes: 62 * 85mm (can be customized);

Component dimensions: the host platform from the ground height of 1000-1200mm, manual lifting and lowering, lifting range of 200MM, the base of the wheel-centered distance of length 410mm, width 375mm; 410mm, width 375mm;

Basket size: 320 * 200 * 100mm from the ground height can be manually adjusted;

Dimension: length 450mm, width 410 mm, height 1200mm

Casters: double-sided ultra-quiet medical 3-inch casters, four wheels on the ground on all sides of the smoother four-wheeled brakes, the surface of the material used in the high-level mute rubber push;

Weight: Net weight ≤ 8.2Kg , Gross weight: ≤ 1l.5Kg ;

Standard: trolley raw materials through the detection ofharmful substances.

Customize trollry case

Mobile trolley confiquration Customize trolley parameter

Upper column	430mm
lower column	915mm
Height	1455mm
Base	510*550mm
Net weight	20KG(W/O display、computer、power supply)
Material	Base and handrail is ABS,column is aluminium alloy
Keyword size	450*215mm，mouse 195*180mm
Other part	Customize
Keyboard andmouse tray	Hidden keyboard positions, suitable for left and right hand usage habits
Caster	
Wheel size	3-inch medical-grade silent casters
Characteristics of casters	Compliant with medical safety regulations for infection control, non-sticky dandruff casters,and capable of overcoming various types of floors
Number of casters	Four pcs casters with brakes
Parameters of the monitor bracket	
Bracke adjustment Angle	The monitor can be raised and lowered independently, with a stroke of >13cm and a rotation of 180 degrees. The screen's elevation Angle can be adjusted by 30 degrees. and it can be rotated horizontally to the left by 90 degrees
After-sales service	
Technical training	Provide technical support for dedicated pre-sale personnel, simple troubleshooting training,and prototype testing
Production	
Product Safety	CE
Product Safety	CCC certification
Production qualification	ISO13485

Customize PC monitor bracket trolley

A dedicated fanless all-in-oneworkstation with UPS function.

Modular all-in-one machine bracket, can beraised and lowered by 13CM, and the load-bearing capacity can be adjusted before leavingthe factory.

Customized keyboard tray. The mouse tray canbe pulled left and right, allowing both the leftand right hands to use the mouse.

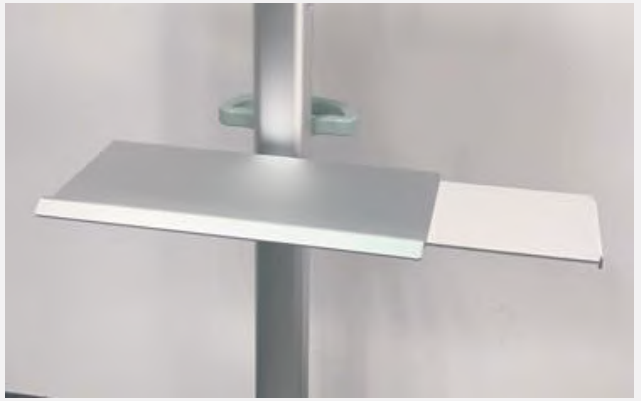

Customize Base of trolley size

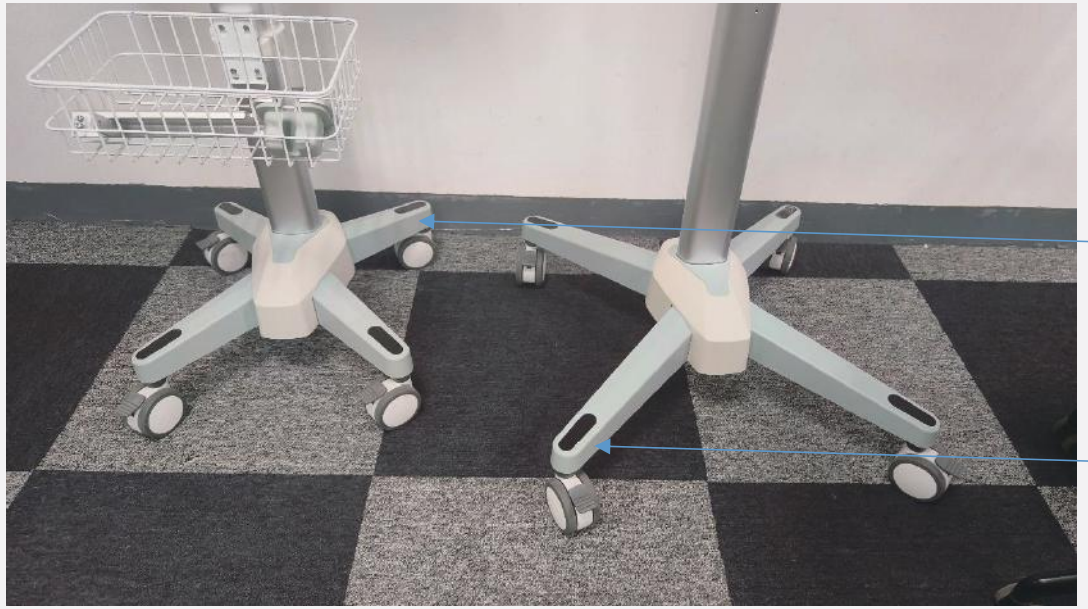

The track length can be customized beforeleaving the factory.The standard version is410mm in length and 375mm in width.

The extended version is 550mm in lengthand 510 mm in width.

Customize mobile lpad ultrasound machine trolley style

Customized adapter platform, which can be connectedto speciallpad utrasound diagnostic instruments.

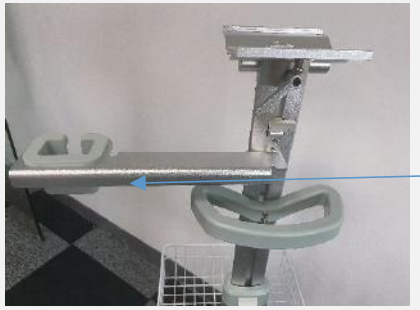

Customized probe brackets can effectivelyprotect the probe and are easy to access

Customize mobile lpad ultrasound machine trolley style

The sundries basket can be a metal basket oran acrylic transparent basket.

Mobile professional workstation case:

For heavier workstations, the liftina function has been removed, An extended base is used at the bottomto stabilize the center of gravity. A modular DC UPS can also be optionally installed to supply power tothe workstation.

Vital sign monitor trolley case:

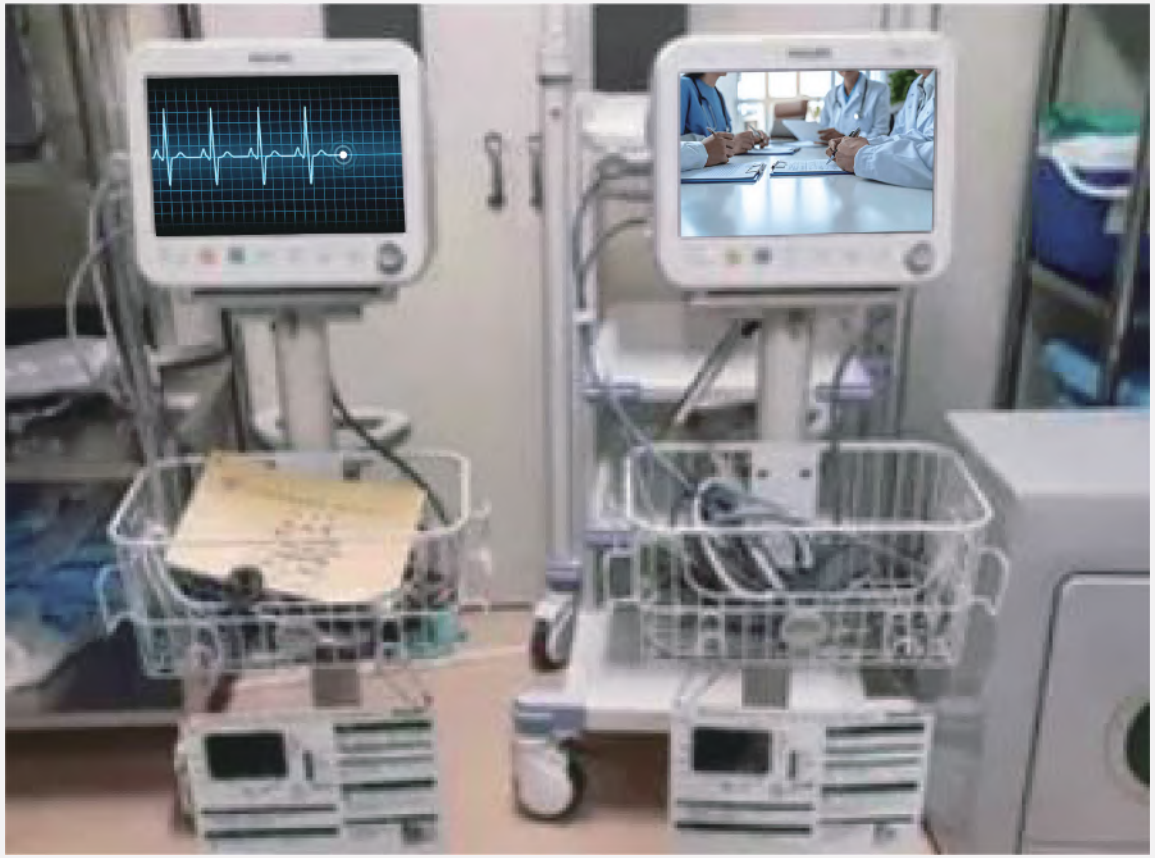

Scan the code to learn more details

Deby Liao
Whatsapp Business Account

MOB/Whatsapp:
+86 18565771898

www.bayint.com
info@bayint.com

402, Block E, CIMC Smar Park,
Keneng Road, Guangming
District, Shenzhen